

Military and Marine Keyboards and Mice



Our military and marine keyboards and mice are engineered to meet the rigorous demands of military applications.

Available in various configurations and customizable to specific operational requirements, our military keyboards and mice ensure seamless integration and superior performance in the most demanding military settings.

Keyboard Series

IP65-IP67

Military&Marine Series

OVMIK-81T-USB-05



Front Panel: 276mm×118.8mm

Number of keys: 81

Protection level: IP66

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-88T-USB-07

Front Panel: 283mm×153.6mm

Number of keys: 88

Protection level: IP66

Interface: USB、PS2


Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None



OVMIK-124T-USB-08

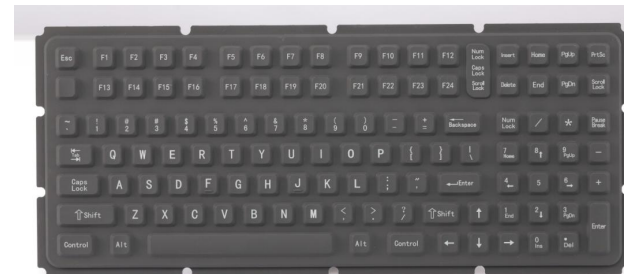

Front Panel: 368mm×148mm

Number of keys: 124

Protection level: IP66

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None



Keyboard Series

IP65-IP67

Military&Marine Series

OVMIK-89T-USB-09



Front Panel: 280.55x177.43mm

Number of keys: 89

Protection level: IP66

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: Blue backlight

OVMIK-49T-USB-79



Front Panel: 320x160mm

Number of keys: 49

Protection level: IP66

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-124T-USB-33 DESK



Front Panel: 412.75x200.13mmx45.71mm

Number of keys: 124

Protection level: IP66


Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-26T-USB-115

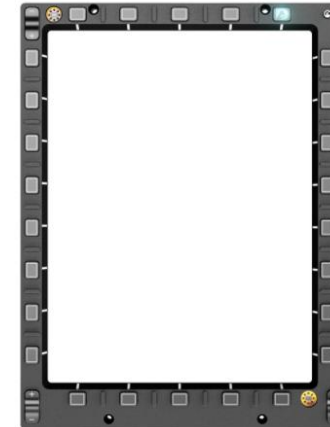

Front Panel: 192x252mm

Number of keys: 26

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-3T-USB-39



Front Panel: 129x172mm

Number of keys: 3

Protection level: IPX6


Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-3T-USB-10

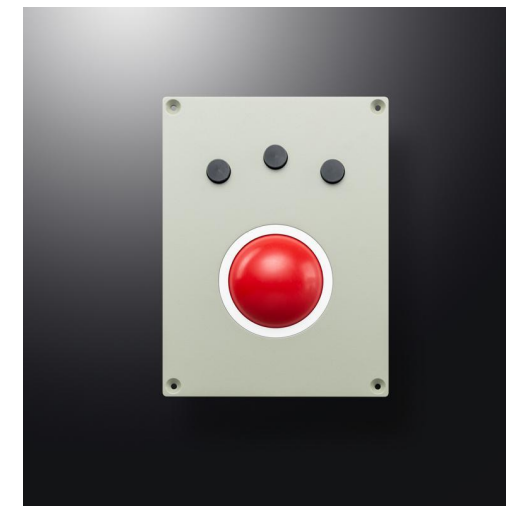

Front Panel: 127x169.5mm

Ball diameter: 60mm

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-3T-USB-30



Front Panel: 129.2x172mm

Ball diameter: 60mm

Protection level: IP54


Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-3T-USB-07



Front Panel: 127x 169.5mm

Ball diameter: 60mm

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-3T-USB-03



Front Panel: 89.6x122.6mm

Ball diameter: 50mm

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-3T-USB-32



Front Panel: 129x172mm

Number of keys: 0

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-1T-USB-05



Front Panel: 150x160mm

Number of keys: 0

Protection level: IP65

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIM-20T-USB-07



Front Panel: 200x175mm

Number of keys: 20

Protection level: IP65

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-81T-USB-08



Front Panel: 440 x180 x 39mm

Number of keys: 81

Protection level: IP66

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-107T-USB-65



Front Panel: 422mm×176mm x37.2mm

Number of keys: 107

Protection level: IP54

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: Optional

OVMIK-67T-USB-75-2



Front Panel: 350mm×129mm

Number of keys: 67

Protection level: IP65

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-107T-USB-66



Front Panel: 468mm×172mm x27.2mm

Number of keys: 107

Protection level: IP54

Interface: USB、PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: Optional

OVMIK-20T-USB-S2



Front Panel: 218x127mm

Number of keys: 20

Protection level: IP65


Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: Optional

OVMIK-86T-USB-16

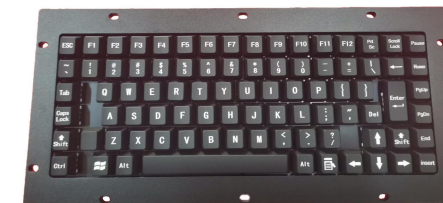

Front Panel: 343 x159 mm

Number of keys: 86

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: Optional

OVMIM-3T-USB-10



Front Panel: 130 x130 mm

Ball diameter: 60mm

Protection level: IP54

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-22T-USB-13



Front Panel: 140 x105 mm

Number of keys: 22

Protection level: IP66

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-59T-USB-29



Front Panel: 270x130mm

Number of keys: 59

Protection level: IP65

Interface: USB

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-18T-USB-02



Front Panel: 86.8x 105.2 mm

Number of keys: 18

Protection level: IP66

Interface: USB/PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None

OVMIK-86T-USB-13



Front Panel: 270 x 110 mm

Number of keys: 86

Protection level: IP65

Interface: USB/PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: Optional

OVMIK-96T-USB-18



Front Panel: 365x 135 mm

Number of keys: 96

Protection level: IP66

Interface: USB/PS2

Voltage: 5V±0.25

Temperature: -40 °C ~ 70 °C

Backlight: None