

## FHD Meeting Room Elevator Monitor

Size: 490 \* 80 \* 5mm

Panel Material: Aluminum brushed panel

Display screen material: fully tempered glass on the surface (free of impurities, high transparency), screen mounting environment: dust-free operation table, professional bonding

Screen frame process: CNC integrated molding, aluminum alloy wire drawing, sandblasting, anodizing Color: wire drawing silver

Size: 15, 6-inch screen. BOE's high-definition screen function:

1. Automatic opening and closing of decorative panels Rich interface terminals;
2. Single machine use and centralized control through central control: Control methods: manual control, lotus control, central control, centralized control Wireless signal: 3157H2 Wireless RF signal Remote control distance: 30 meters
3. Support wireless network control RS232, RS485:
4. It can be manually or remotely controlled to lift and lower smoothly with low noise. Equipped with elevation angle function, capable of an elevation angle of 15 degrees.
5. High definition screen configuration sockets: power socket, central control socket, VGA interface, DVI socket, HDNI socket, audio interface Wireless signal: 433MHI Wireless RF signal Remote control distance: 30 meters



Display tilt angle:  $\leq 15^{\circ}$

Power supply: AC220V50-60/Hz:

Electricity consumption: 40m

Color: brushed noble black, brushed elegant silver


## 15.6"FHD Meeting Room Elevator Monitor

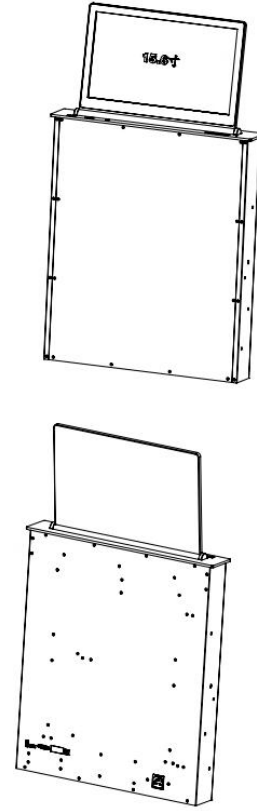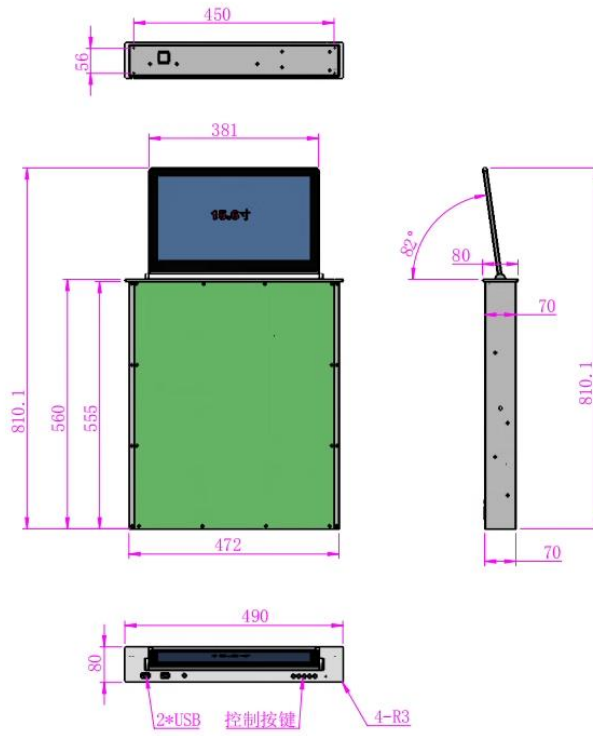

15.6寸升降机(电容)



## 17.3"FHD Meeting Room Elevator Monitor

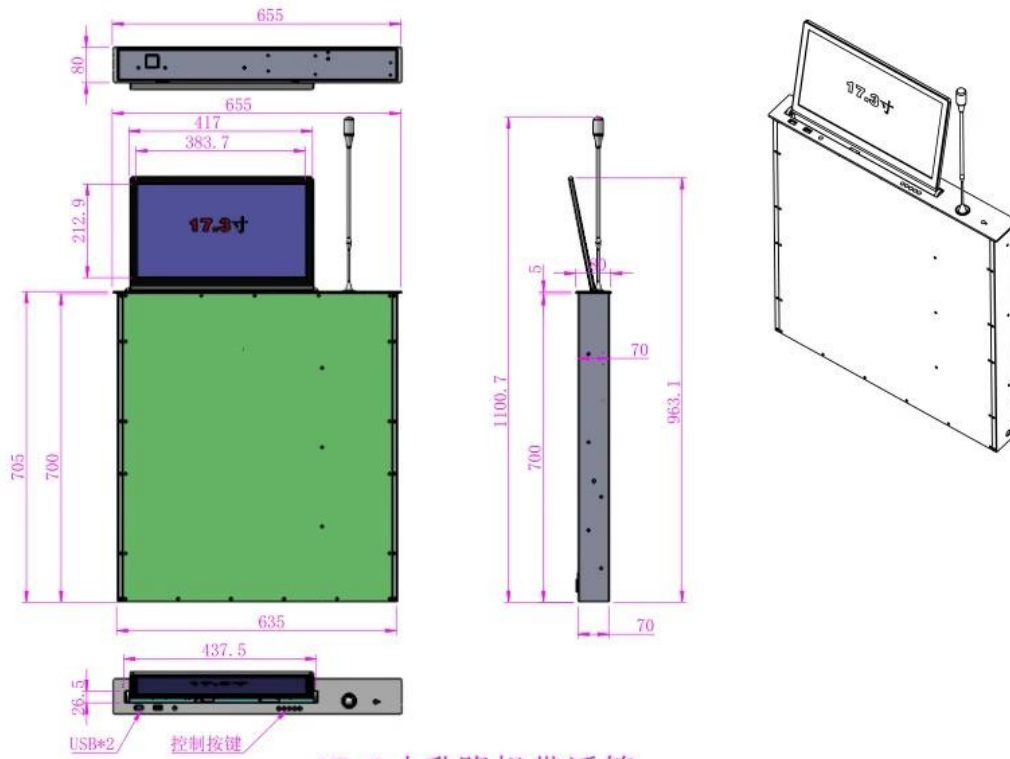

17.3寸升降机带话筒

