

DX-1300

Intel® Arrow Lake-S Core™ Ultra 200S Series Processors, High Performance and Compact Rugged Embedded Computer



Rugged · Powerful · Compact

DX-1300 Series – Intel Arrow Lake-S Core Ultra Edge Computer

Overview

[CONTACT](#)

The DX-1300 is a compact industrial computer engineered for high-performance edge computing. Powered by an Intel Arrow Lake-S Core™ Ultra 200S series processor, it supports demanding edge applications, including advanced image processing, AI inference, and data integration across multiple tasks. The DX-1300 series packs exceptional computing performance and a rich feature set into a compact chassis while maintaining industrial-grade ruggedness. It is particularly well-suited for high-performance applications with limited installation space and has earned high acclaim in the manufacturing, in-vehicle, and railway markets.

Key Features


- Intel® Arrow Lake-S Core™ Ultra 200S Series (Max 65 W TDP)
- 2x DDR5 SODIMM/CSODIMM Sockets, Up to 6400MHz, 96GB
- Wide Operating Temperature -40°C to 60°C
- Optional CMI Modules for I/O Expansion
- Optional CFM Modules for Hardware TPM, Ignition Sensing & PoE

Certifications




Next-Generation Edge AI Computing Performance

The Intel® Core™ Ultra 200S series processors deliver up to 36 TOPS of AI computing performance through an integrated CPU, GPU, and NPU. This design, specifically for AI acceleration, delivers more than a 3.5x improvement over the previous generation platform.

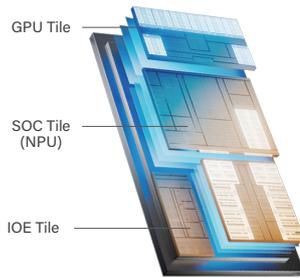

Up to **36** Total Platform TOPS

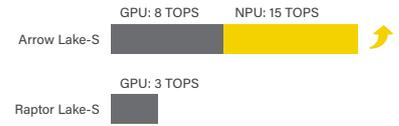

Compact Chassis

Measuring only 242 x 173 x 75mm, the compact chassis has a footprint comparable to an 11-inch iPad. This enables flexible deployment in space-constrained environments such as control cabinets, equipment interiors, or in-vehicle systems.

Rich & Versatile Expandability

Multiple built-in M.2 B/E key slots offer flexible support for wireless communication modules (5G, GNSS, Wi-Fi, Bluetooth), high-speed storage (NVMe SSD), and high-capacity storage (SATA SSD). It also supports I/O expansion modules, allowing for versatile configurations tailored to specific application needs.



Stable, High-speed Data Transmission

Fast and reliable data transmission is crucial for applications such as image capture and surveillance. The DX-1300 supports multiple high-speed I/O ports, including 10/2.5/1 GbE LAN and USB 3.2. It can be expanded to support up to 12x LAN ports or 8x PoE, effectively simplifying cabling.

Rugged & Multi-vertical Certifications

The rugged design of the DX-1300 complies with military standards (MIL-STD-810H), railway certifications (EN 50121-3-2 & EN 45545-2), ensuring reliable operation in various harsh environments.



Specifications


| Model Name | DX-1300 |
|--------------------------------------|---|
| System | |
| Processor | <ul style="list-style-type: none"> • Arrow Lake-S Ultra 200S Series CPU: <ul style="list-style-type: none"> - Intel® Core™ Ultra 9 285 24 Cores Up to 5.6 GHz, TDP 65W - Intel® Core™ Ultra 9 285T 24 Cores Up to 5.4 GHz, TDP 35W - Intel® Core™ Ultra 7 265 20 Cores Up to 5.3 GHz, TDP 65W - Intel® Core™ Ultra 7 265T 20 Cores Up to 5.3 GHz, TDP 35W - Intel® Core™ Ultra 5 245 14 Cores Up to 5.1 GHz, TDP 65W - Intel® Core™ Ultra 5 245T 14 Cores Up to 5.1 GHz, TDP 35W - Intel® Core™ Ultra 5 225 10 Cores Up to 4.9 GHz, TDP 65W - Intel® Core™ Ultra 5 225T 10 Cores Up to 4.9 GHz, TDP 35W |
| Chipset | <ul style="list-style-type: none"> • Intel W880 Chipset |
| Memory | <ul style="list-style-type: none"> • 2x DDR5 SODIMM/CSODIMM Socket, Support Un-buffered and ECC Type <ul style="list-style-type: none"> - Ultra 9 / 7: Supports Up to 6400MHz, 96GB - Ultra 5: Supports Up to 5600MHz, 96GB |
| BIOS | <ul style="list-style-type: none"> • AMI BIOS |
| Graphics | |
| Graphics Engine | <ul style="list-style-type: none"> • Integrated Intel® X^e LPG Graphics |
| Maximum Display Output | <ul style="list-style-type: none"> • Supports Quad Independent Display |
| VGA | <ul style="list-style-type: none"> • 1x VGA Connector : 1920 x 1200@60Hz |
| DP | <ul style="list-style-type: none"> • 1x DP Connector : 4096 x 2304@60Hz <ul style="list-style-type: none"> - Support cable switch HDMI 4096 x 2160@30Hz * Verified maximum resolution: 3840x2160 @60Hz |
| HDMI | <ul style="list-style-type: none"> • 1x HDMI Connector : 4096x2160@30Hz <ul style="list-style-type: none"> * Verified maximum resolution: 3840x2160 @30Hz |
| Audio | |
| Audio Codec | <ul style="list-style-type: none"> • Realtek® ALC888, High Definition Audio |
| Line-out | <ul style="list-style-type: none"> • 1x Line-out, Phone Jack 3.5mm |
| Mic-in | <ul style="list-style-type: none"> • 1x Mic-in, Phone Jack 3.5mm |
| I/O | |
| LAN | <ul style="list-style-type: none"> • 2x 2.5 GbE LAN, RJ45 <ul style="list-style-type: none"> - GbE1~2: Intel® I226 |
| COM | <ul style="list-style-type: none"> • 4x RS-232/422/485 with Auto Flow Control (Supports 5V/12V), DB9 |
| USB | <ul style="list-style-type: none"> • 4x 10Gbps USB 3.2 Gen2x1, Type A • 4x 5Gbps USB 3.2 Gen1x1, Type A |
| Storage / Expansion | |
| 2.5" SSD / HDD | <ul style="list-style-type: none"> • 2x 2.5" Front Accessible SATA HDD/SSD Bay (SATA 3.0) |
| M.2 Key B Socket | <ul style="list-style-type: none"> • 1x M.2 Key B Type 3042/3052 Socket (PCIe Gen 3x2 / USB3.2 Gen1x1 / SATA), Support 5G / GNSS / Storage / Add-on Card Expansion • 1x M.2 Key B Type 2242 Socket (PCIe Gen 4x2 / SATA / USB 2.0), Support Storage / Add-on Card Expansion |
| M.2 Key E Socket | <ul style="list-style-type: none"> • 1x M.2 Key E Type 2230 Socket (PCIe Gen 3x2 / USB2.0), Support Wireless / Bluetooth / Storage / Intel CNVi Module Expansion |
| SIM | <ul style="list-style-type: none"> • 1x SIM Socket |
| CMI (Combined Multiple I/O) Socket | <ul style="list-style-type: none"> • 2x High Speed CMI Interface for optional CMI Module Expansion • 1x Low Speed CMI Interface for optional CMI Module Expansion |
| CFM (Control Function Module) Socket | <ul style="list-style-type: none"> • 1x CFM-IGN Interface for optional CFM-IGN Module Expansion • 1x CFM-TPM Interface for optional CFM-TPM Module Expansion |

| | |
|-------------------------------------|---|
| Other Function | |
| RAID | • Support RAID 0/1/5/10 |
| External FAN Connector | • 1x External FAN Connector, 4-pin Terminal Block (Support Smart Fan by BIOS) |
| Power Ignition Sensing | • Support Power Ignition Sensing Function with Delay Time Management and Selectable 12V/24V (With Optional CFM Module) |
| TPM | • Support Discrete TPM2.0 (with Optional CFM Module) |
| Clear CMOS Switch | • 1x Clear CMOS Switch |
| Reset Button | • 1x Reset Button |
| Instant Reboot | • Support 0.2sec Instant Reboot Technology |
| Watchdog Timer | • Software Programmable Supports 256 Levels System Reset |
| Antenna Holes | • 3 |
| Power | |
| Power Button | • 1x ATX Power On/Off Button |
| Power Mode Switch | • 1x AT/ATX Mode Switch |
| Power Input | • 9-48VDC, 3-pin Terminal Block |
| Remote Power On/Off | • 1x Remote Power On/Off, 2-pin Terminal Block |
| Remote Power LED | • 1x Remote Power LED, 2-pin Terminal Block |
| Max. Power Consumption | <ul style="list-style-type: none"> • 35W CPU: 162W • 65W CPU: 272.88W - Test conducted with CPU, 1x RAM, and 1x storage - 100% load during burn-in test |
| Inrush Current (Peak) | <ul style="list-style-type: none"> • 35W CPU: 5.24 A@24V • 65W CPU: 4.939 A@24V |
| Physical | |
| Dimension (W x D x H) | • 242.2 x 173 x 75mm |
| Weight Information | • 3.59 kg |
| Mechanical Construction | • Extruded Aluminum with Heavy Duty Metal |
| Mounting | • Wall / DIN-RAIL / VESA / Side Mount |
| Physical Design | <ul style="list-style-type: none"> • Fanless Design • Cableless Design • Jumper-less Design • Unibody Design |
| Reliability & Protection | |
| Reverse Power Input Protection | • Yes |
| Over Voltage Protection | <ul style="list-style-type: none"> • Protection Range: 51~58V • Protection Type: shut down operating voltage, re-power on at the preset level to recover |
| Over Current Protection | • 15A |
| CMOS Battery Backup | • SuperCap Integrated for CMOS Battery Maintenance-free Operation |
| MTBF | <ul style="list-style-type: none"> • 332,808 Hours - Database: Telcordia SR-332 Issue3, Method 1, Case 3 |
| Operating System | |
| Windows | • Windows®11, Windows® 10 |
| Linux | • Ubuntu 24.04 |


| Environment | |
|------------------------|--|
| Operating Temperature | <ul style="list-style-type: none"> • 35W TDP Processor: -40°C to 60°C (-40°F to 140°F) • 65W TDP Processor: -40°C to 50°C (-40°F to 122°F) With External Fan Kit <ul style="list-style-type: none"> - With extended temperature peripherals; Ambient with air flow - According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14 |
| Storage Temperature | <ul style="list-style-type: none"> • -40°C to 85°C (-40°F to 185°F) |
| Relative Humidity | <ul style="list-style-type: none"> • 95%@60°C (non-Condensing) |
| Shock | <ul style="list-style-type: none"> • MIL-STD-810H |
| Vibration | <ul style="list-style-type: none"> • MIL-STD-810H |
| EMC | <ul style="list-style-type: none"> • CE, UKCA, FCC, ICES-003 Class A |
| EMI | <ul style="list-style-type: none"> • CISPR 32 Conducted & Radiated: Class A • EN/BS EN 50121-3-2 Conducted & Radiated: Class A • EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A • EN/BS EN61000-3-3 Voltage fluctuations & flicker • FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A |
| EMS | <ul style="list-style-type: none"> • EN/IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV • EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 20 V/m • EN/IEC 61000-4-4 EFT: AC Power: 2 kV; DC Power: 1 kV; Signal: 2 kV • EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV • EN/IEC 61000-4-6 CS: 10V • EN/IEC 61000-4-8 PF: 50 Hz, 30A/m • EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 1 cycles at 60 Hz |
| Railway | <ul style="list-style-type: none"> • EMC: <ul style="list-style-type: none"> EN 50155: 2021 Clause 4.4.6, 13.4.9 - EN 50121-1 : 2017 - EN 50121-3-2: 2016 + A1: 2019 |
| Industrial Environment | <ul style="list-style-type: none"> • EMC <ul style="list-style-type: none"> - EN/BS/IEC 61000-6-4: 2019 Class A - EN/BS/IEC 61000-6-2: 2019 (Compliant with additional power protection module) |
| Maritime Application | <ul style="list-style-type: none"> • EMC <ul style="list-style-type: none"> - IEC 60945 (Compliant with additional power protection module) |
| Fire Protection | <ul style="list-style-type: none"> • EN 45545-2 |
| Safety | <ul style="list-style-type: none"> • UL, cUL, CB, IEC, EN 62368-1 |

External Layout


Front I/O

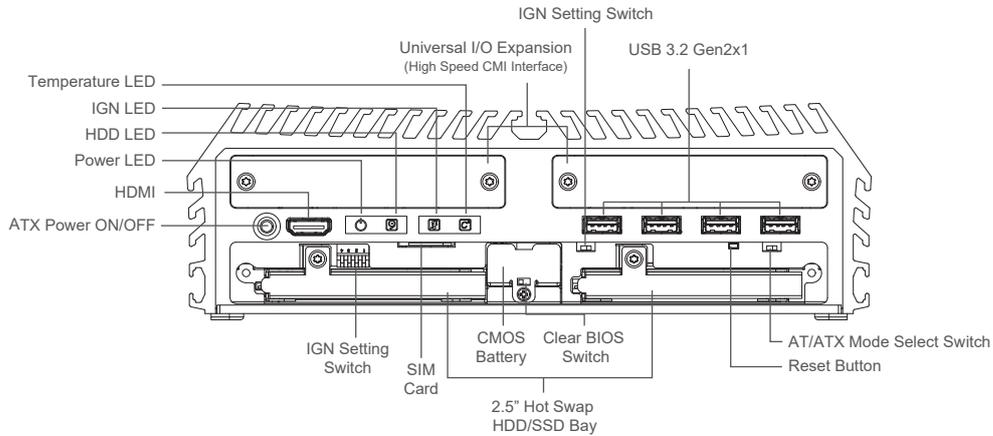

Rear I/O

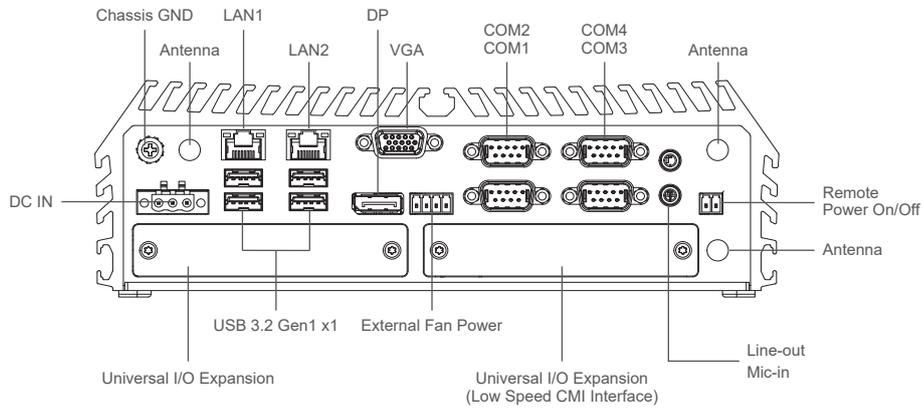

Dimensions

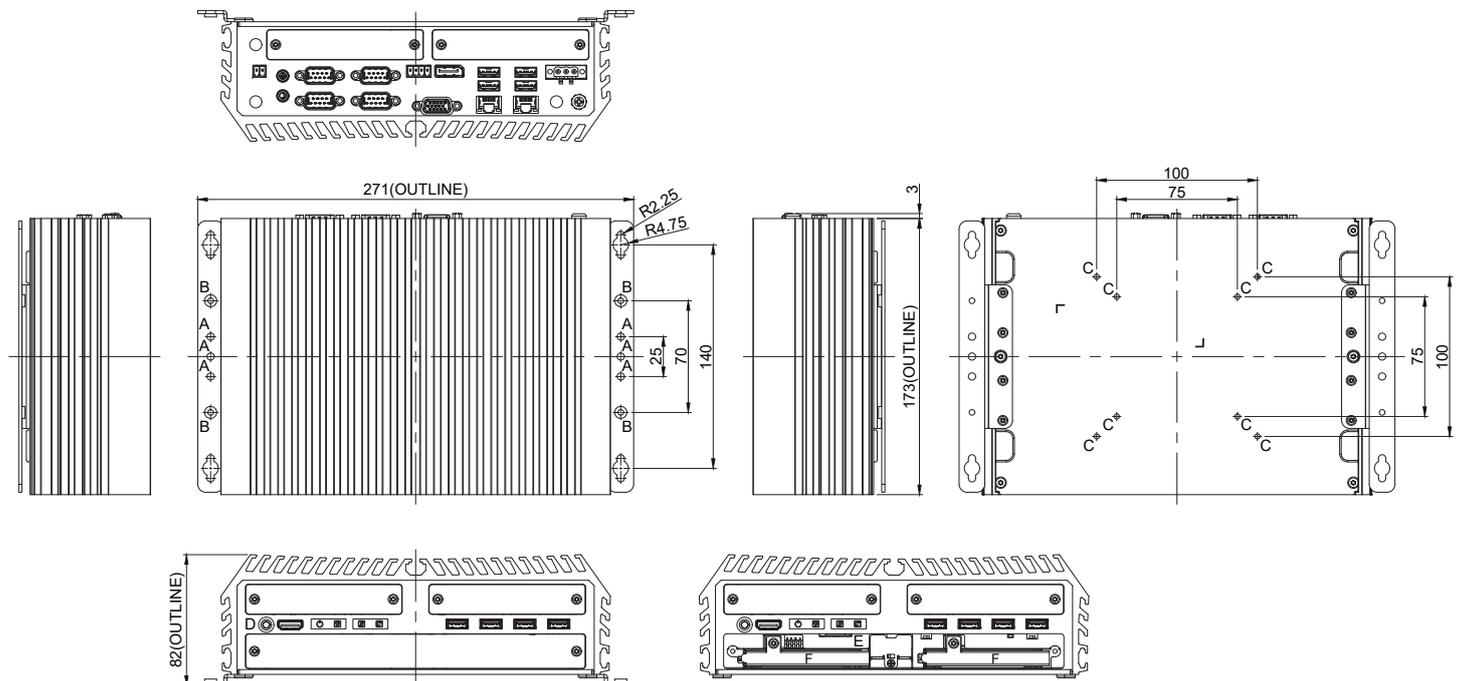

Unit: mm

Ordering Information

Available Models

| Model No. | Description |
|-------------|---|
| DX-1300-R10 | Intel® Arrow Lake-S Core™ Ultra 200S Series Processors, High Performance and Compact Rugged Embedded Computer |



Package Checklist

| | |
|-------------------------------------|--|
| • DX-1300 Series Embedded System x1 | • Power Terminal Block Connector x1 |
| • CPU Heatsink Pack x1 | • Remote Power On/Off Terminal Block Connector x 1 |
| • Screw Pack x 1 | • Fan Terminal Block Connector x 1 |
| • Wall Mounting Kit x1 | • M.2 Key B Type 3052 to 3042 Adapter Bracket x1 |

Optional Modules and Accessories

| Model No. | Description |
|----------------------|--|
| CFM-PoE01 | CFM Module with PoE Control Function, Individual Port 25.5W |
| CFM-IGN01 | CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable |
| CFM-TPM02-R10 | CFM Module with Hardware TPM 2.0 |
| CMI-LAN01-R12 | CMI Module with 4x RJ45 Intel I210 1GbE LAN Ports |
| CMI-M12LAN01-R12 | CMI Module with 4 x M12 Intel I210 1GbE LAN Ports |
| CMI-XM12LAN01-R10 | CMI Module with M12 X-Coded Connector, 4x Intel I210 1GbE LAN Ports |
| CMI-2P5GLAN01-R10 | CMI Module with 4x Intel 2.5GbE LAN, RJ45 Port |
| CMI-10GLAN05-R10 | CMI Module with 2x Intel 10GbE LAN, RJ45 Port |
| CMI-10GXM12LAN01-R10 | CMI Module with 2x Intel 10GbE LAN, M12 X-Coded Connector |
| CMI-DIO01 | CMI Module with 16DIO (8in 8out) |
| CMI-COM01 | CMI Module with 2x RS232/422/485 (Support 5V/12V) |
| MEC-CAN-2812i | M.2 2242/2260/2280 (B+M key) dual isolated CAN bus 2.0B board (-40°C~+85°C), 2x DB9 Connector, Cervoz |
| MEC-CAN-2814i | M.2 2242/2260/2280 (B+M key) quad isolated CAN bus 2.0B board (-40°C~+85°C), 4x DB9 Connector, Cervoz |
| MEC-COM-2012 | M.2 2242/2260/2280 (B+M key) 2-port RS-232 serial board (-40°C~+85°C), 2x DB9 Connector, Cervoz |
| MEC-COM-2032i | M.2 2242/2260/2280 (B+M key) 2-port RS-232/422/485 isolated serial board (-40°C~+85°C), 2x DB9 Connector, Cervoz |
| MEC-LAN-2002i | M.2 2242/2260/2280 (B+M key) 2-port 10/100/1000 isolated Ethernet board(-40°C~+85°C), 2x RJ45 Connector, Cervoz |
| MEC-LAN-2002i-S | M.2 2242/2260/2280 (B+M key) 2-port 10/100/1000 isolated Ethernet board(0°C~+70°C), 2x RJ45 Connector, Cervoz |
| UB0930-R10 | Universal Bracket with 4x M12 X-Coded Cutout |
| UB0932-R10 | Universal Bracket with 3x Antenna Cutout |
| UB1303 | Universal Bracket with 2x DB9 Cutout |
| UB1311 | Universal Bracket with 2x RJ45 Cutout for MEC-LAN Expansion |
| UB1318 | Universal Bracket with DIO Cutout |
| UB1710-R10 | Universal Bracket with 4x M12 A-Coded Cutout |
| UB1712-R10 | Universal Bracket with 4x RJ45 Cutout |
| UB1728-R10 | Universal Bracket with 2x RJ45 Cutout for CMI-10GLAN Expansion |
| UB1737-R10 | Universal Bracket with 2x M12 X-coded Cutout |
| AC-BE01-R10 | M.2 Key B Type 2242 to M.2 Key E Type 2230 Adapter Card |
| SIDE-DX | DX Series side mount kit |
| DIN01 | DIN-RAIL Mount Kit, KMRH-K175 |
| GST220A24-CIN | Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug and Tubes, Level VI |
| GST360A24-CIN | Adapter AC/DC 24V 15A 360W with 3pin Terminal Block Plug and TUBES, Level VI |
| RSD-200D-24 | Railway Single Output DC-DC Converter 200W / DC 24V |
| FAN-EX101 | External Fan with 4pin Terminal Block Plug and Mounting Bracket, Support smart fan |

Optional Module Configuration

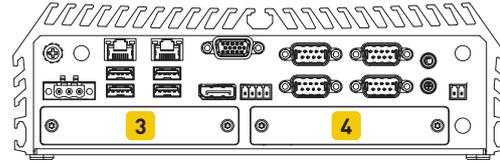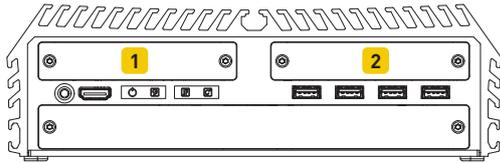

| Model No. | Description | 1 | 2 | 3 | 4 |
|--|--|---|---|---|---|
| UB0932-R10  | Universal Bracket with 3x Antenna Cutout | V | V | V | V |
| CMI-LAN01-R12/UB1712-R10  | CMI Module with 4x Intel I210 1GbE LAN, RJ45 Port / Universal Bracket with 4x RJ45 Cutout | V | V | - | - |
| CMI-2P5GLAN01-R10/UB1712-R10  | CMI Module with 4x Intel 2.5GbE LAN, RJ45 Port / Universal Bracket with 4x RJ45 Cutout | V | V | - | - |
| CMI-10GLAN05-R10/UB1728-R10  | CMI Module with 2x Intel 10GbE LAN, RJ45 Port/ Universal Bracket with 2x RJ45 Cutout | V | V | - | - |
| CMI-M12LAN01-R12/UB1710-R10  | CMI Module with M12 Connector, 4x Intel 1GbE LAN / Universal Bracketwith 4x M12 A-Coded Cutout | V | V | - | - |
| CMI-XM12LAN01-R10/UB0930-R10  | CMI Module with M12 X-Coded Connector, 4x Intel I210 1GbE LAN Ports / Universal Bracket with 4x M12 X-Coded Cutout | V | V | - | - |
| CMI-10GXM12LAN01-R10/UB1737-R10  | CMI Module with 2x Intel 10GbE LAN, M12 X-Coded Connector / Universal Bracket with 2x M12 X-coded Cutout | V | V | - | - |
| CMI-DIO01/UB1318  | CMI Module with 16DIO (8in 8out) / Universal Bracket with DIO Cutout | - | - | - | V |
| CMI-COM01/UB1303  | CMI Module with 2x RS232/422/485 (Support 5V/12V) / Universal Bracket with 2x DB9 Cutout | - | - | - | V |
| MEC-COM-2012/UB1303  | M.2 Module with 2x RS-232 Ports, 1x Standard DB9 Cable / Universal Bracket with 2x DB9 Cutout | - | - | V | - |
| MEC-COM-2032i/UB1303  | M.2 Module with 2x RS-232/422/485 Ports, 1x Standard DB9 Cable / 2x Universal Bracket with 2x DB9 Cutout | - | - | V | - |
| MEC-CAN-2812i/UB1303  | M.2 Module with 2x isolated CAN bus 2.0B Ports, 2x Standard DB9 Cable / Universal Bracket with 2x DB9 Cutout | - | - | V | V |
| MEC-CAN-2814i/2xUB1303  | M.2 Module with 4x isolated CAN bus 2.0B Ports, 4x Standard DB9 Cable / 2x Universal Bracket with 2x DB9 Cutout | - | - | V | |
| MEC-LAN-2002i(-S)/UB1311  | M.2 Module with 2x LAN Ports, 2x 30cm cable / Universal Bracket with 2x RJ45 Cutout for MEC-LAN Expansion | - | - | V | - |

V : Compatible